




# CYLINDRICAL ASSEMBLIES



(1)

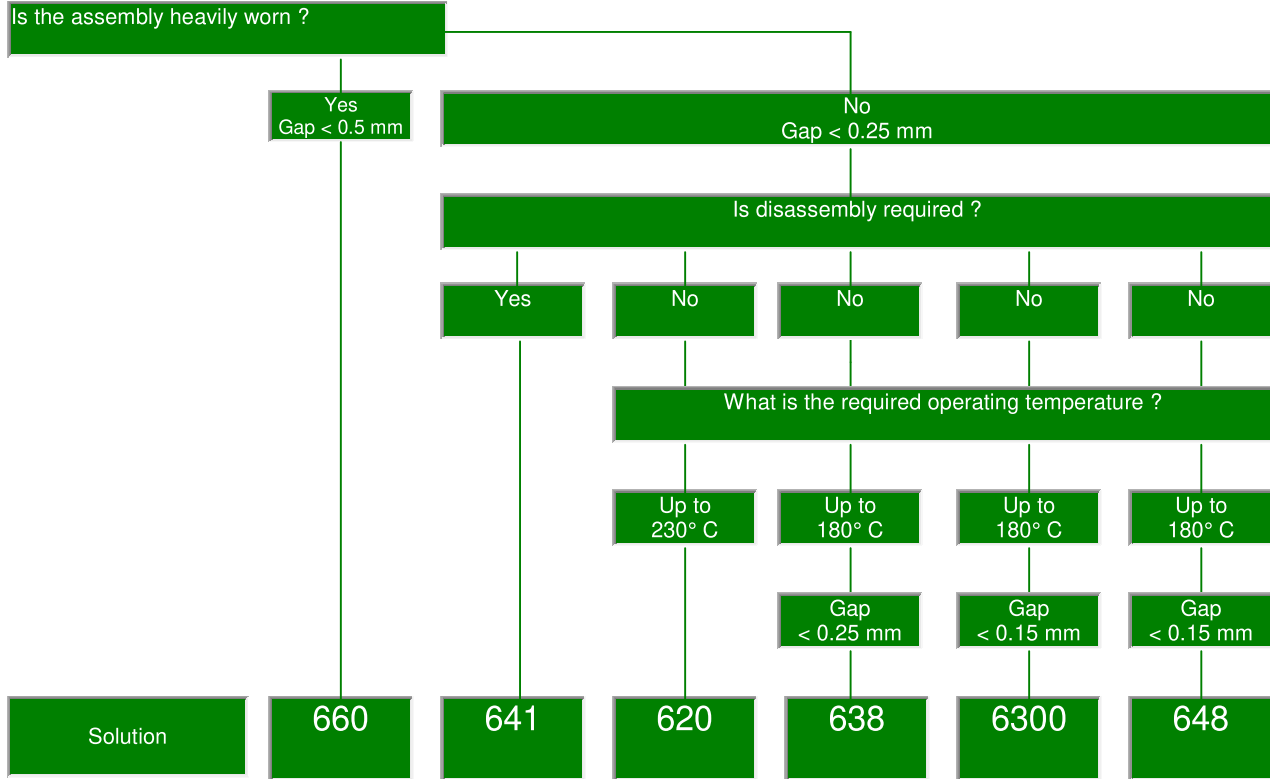

(2)



(3)



(4)



(5)



(6)

- High strength products can withstand high loads
- Full filling of gaps to prevent corrosion and fretting
- Uniform stress distribution.

**LOCTITE®****Products list (cylindrical assemblies) :**

MSA	No.	Vol.	Colour	Fixture time on steel	Temp.	Viscosity mPa.s
26.543	601	10 ml	Fluo Green	25 min.	-55...+150° C	100-150
26.511	601	50 ml	Fluo Green	25 min.	-55...+150° C	100-150
26.528	603	10 ml	Fluo Green	8 min.	-55...+150° C	100-150
26.529	603	50 ml	Fluo Green	8 min.	-55...+150° C	100-150
26.529-250	603	250 ml	Fluo Green	8 min.	-55...+150° C	100-150
26.589-050 (3)	620	50 ml	Green	80 min.	-55...+230° C	5000-12000
26.589-250	620	250 ml	Green	80 min.	-55...+230° C	5000-12000
26.530 (4)	638	10 ml	Fluo Green	4 min.	-55...+180° C	2000-3000
26.531	638	50 ml	Fluo Green	4 min.	-55...+180° C	2000-3000
26.531-250	638	250 ml	Fluo Green	4 min.	-55...+180° C	2000-3000
26.539	641	10 ml	Yellow	25 min.	-55...+150° C	400-800
26.540 (2)	641	50 ml	Yellow	25 min.	-55...+150° C	400-800
26.540-250	641	250 ml	Yellow	25 min.	-55...+150° C	400-800
26.532-010	648	10 ml	Fluo Green	3 min.	-55...+180° C	400-600
26.532 (6)	648	50 ml	Fluo Green	3 min.	-55...+180° C	400-600
26.532-250	648	250 ml	Fluo Green	3 min.	-55...+180° C	400-600
26.556-050 (1)	660	50 ml	Silver	15 min.	-55...+150° C	150000-350000
26.634-050 (5)	6300	50 ml	Fluo Green	10 min.	-55...+180° C	250-550
26.634-250	6300	250 ml	Fluo Green	10 min.	-55...+180° C	250-550