




INSTANT ADHESIVES

What type of material are you bonding ?

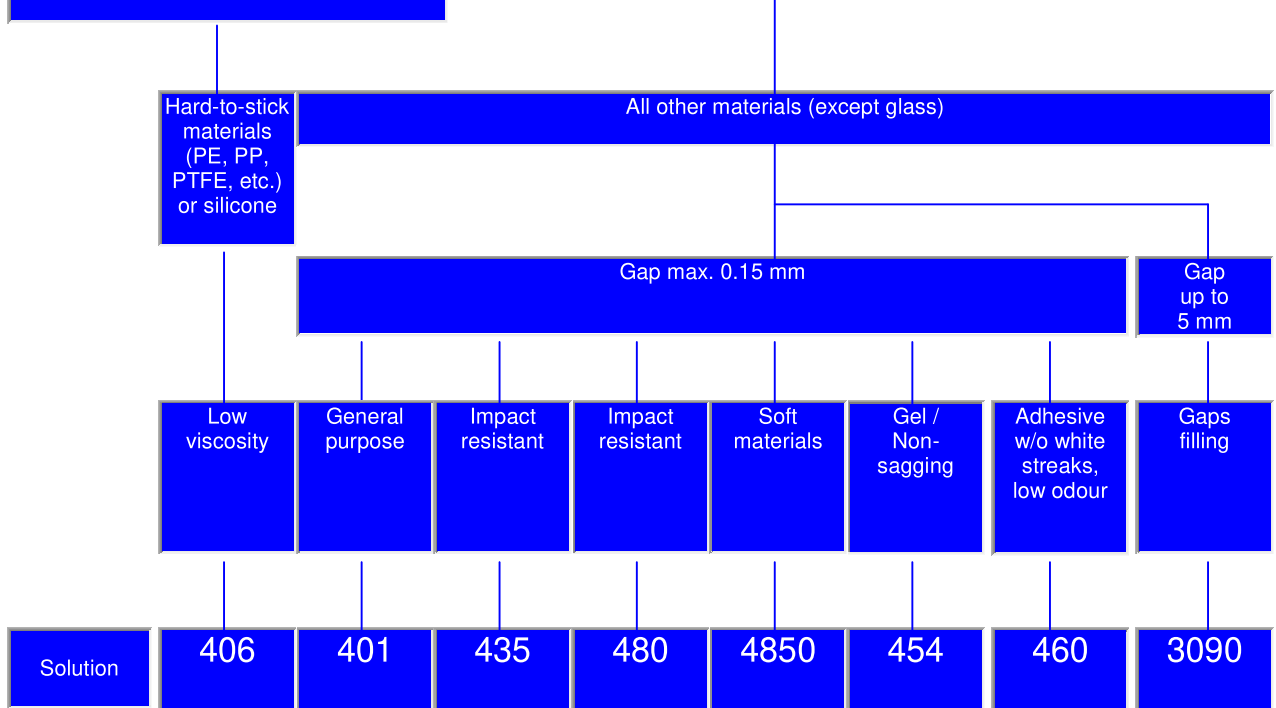

(1)



(2)



(3)



(4)



(5)



(6)



(7)



(8)

LOCTITE®

- Clean and easy application.
- Very fast positioning and fixing of parts.
- Bonding of a wide range of materials.
- Excellent adhesion to a wide range of substrates, particularly plastics and rubbers. LOCTITE SF 770 and SF 7239 primers are designed to improve adhesion on hard-to-stick materials such as PP, PE, POM, PTFE or silicone.
- High resistance on very small surfaces. Solvent free.

Products list (instant adhesives) :

MSA	No.	Vol.	Colour	Fixture time	Temp.	Viscosity mPa.s
26.533-003	401	3 g	Transparent and colourless	3 - 10 s	-40...+120° C	100
26.533	(2) 401	20 g	Transparent and colourless	3 - 10 s	-40...+120° C	100
26.533-100	401	100 g	Transparent and colourless	3 - 10 s	-40...+120° C	100
26.533-500	401	500 g	Transparent and colourless	3 - 10 s	-40...+120° C	100
26.536	(1) 406	20 g	Transparent and colourless	2 - 10 s	-40...+120° C	20
26.536-500	406	500 g	Transparent and colourless	2 - 10 s	-40...+120° C	20
26.518-020	431	20 g	Transparent and colourless	5 - 10 s	-40...+80° C	1000
26.518-500	431	500 g	Transparent and colourless	5 - 10 s	-40...+80° C	1000
26.587-020	(3) 435	20 g	Transparent and colourless	10 - 20 s	-40...+100° C	200
26.587-500	435	500 g	Transparent and colourless	10 - 20 s	-40...+100° C	200
26.558-010	454	10 g	Transparent and colourless	5 - 10 s	-40...+120° C	Gel
26.558-020	(6) 454	20 g	Transparent and colourless	5 - 10 s	-40...+120° C	Gel
26.558-200	454	200 g	Transparent and colourless	5 - 10 s	-40...+120° C	Gel
26.609	(7) 460	20 g	Transparent and colourless	5 - 20 s	-40...+80° C	40
26.519	(4) 480	20 g	Black	20 - 50 s	-40...+100° C	200
26.519-500	480	500 g	Black	20 - 50 s	-40...+100° C	200
26.534	496	20 g	Transparent and colourless	10 - 30 s	-40...+80° C	125
26.618	4031	20 g	Transparent and colourless	20 - 60 s	-40...+80° C	1200
26.548-020	4062	20 g	Transparent and colourless	2 - 5 s	-40...+80° C	2
26.588-020	4204	20 g	Transparent and colourless	10 - 30 s	-40...+120° C	4000
26.559-020	(5) 4850	20 g	Transparent and colourless	3 - 10 s	-40...+80° C	400